


FLORIDA DEPARTMENT OF NATURAL RESOURCES  
CERTIFIED CORNER RECORD

CORNER DESCRIPTION:

S.W. corner of Section 2 ,  
Twp 40 S , Rge 22 E. ,  
Tallahassee Base Meridian,  
CHARLOTTE County(s), Florida.

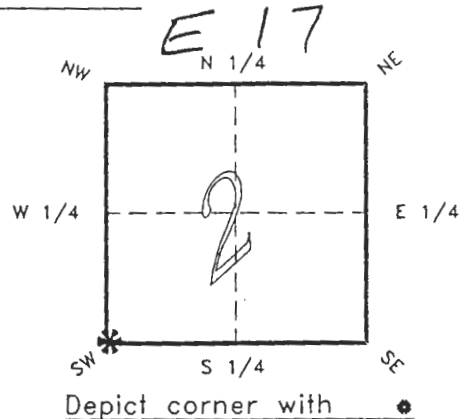

MONUMENTATION DESCRIPTION:

Describe original monument and accessories, or subsequent restoration. Give sources of information. (If no attempt was made to search for the original monument and accessories, this information is not necessary.)

Description of corner evidence found:

1" IRON PIPE WITH PK NAIL IN TOP, REPLACED WITH CONCRETE MONUMENT IN WELL.

State method(s) to determine corner location (lost corners only):

HORIZONTAL POSITION INFORMATION (if determined):

Latitude 27°01'03.17873" N Longitude 82°05'25.58244" W  
Y(Northing) 297351.720 m X(Easting) 191025.350 m Zone FL. W  
Convergence -0.02'27.900" Scale factor 0.99994217

Coordinate determination (circle one): Field traverse  GPS

Horizontal datum (circle one): NAD27 NAD83(1986)  NAD83(1990) other (explain)


Order of accuracy as defined in "Standards and Specifications for Geodetic Control Networks" published by the Federal Geodetic Control Committee (circle one):

1st,  2nd,  3rd, class 1 ,

or Minimum Technical Standards (Chapter 21HH-6, F.A.C.) ratio of closure for field data (example 1:10,000), \_\_\_\_\_ . This does not specify an order of accuracy.

Control point(s) used for survey: CHARLOTTE COUNTY HORIZONTAL CONTROL NETWORK INCLUDES HAVOLINE 2, PLACIDA 2, W260, PUNTAPORT, & FLGPS 58 AS B ORDER STATIONS.

Comments:



OCT 01 1993


SURVEY & MAPPING

4022E17

DOC. #

0046784

SKETCH:

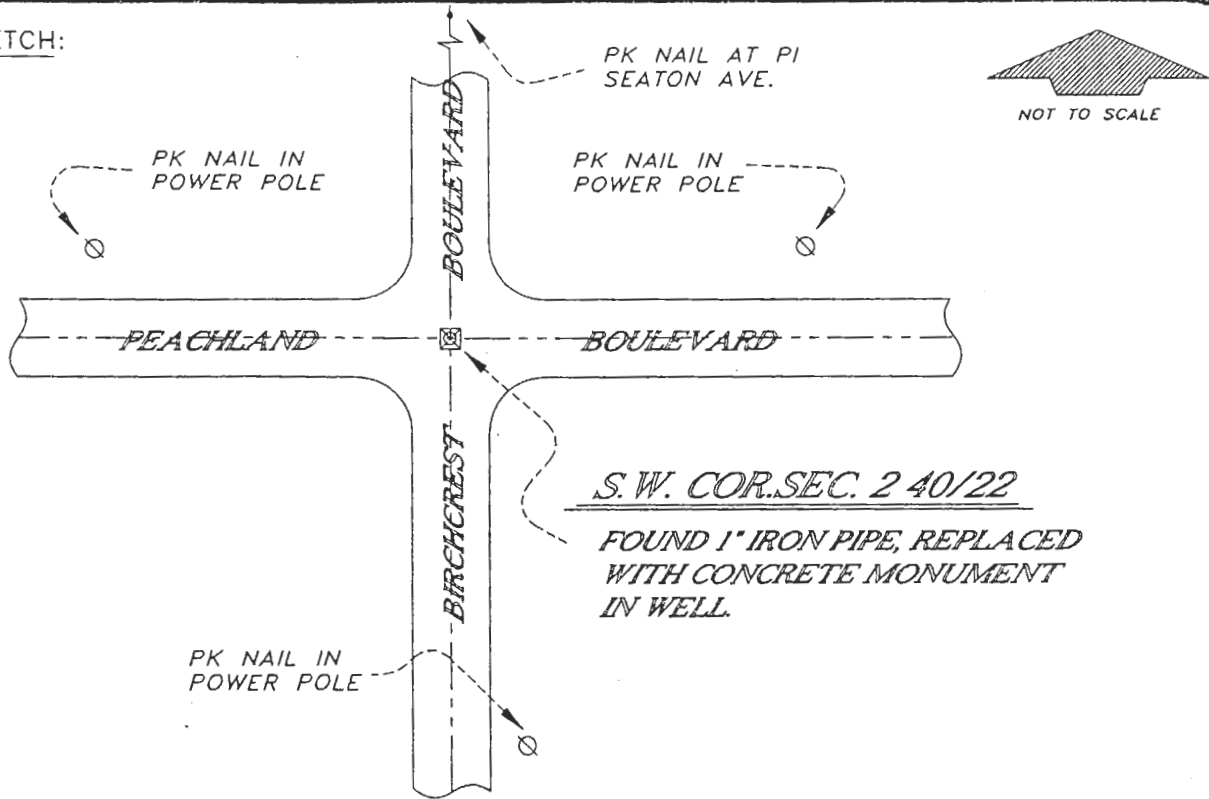

BASIS OF BEARING SOLAR OBSERVATION

REFER FB 264/77

All bearings and distances must be from the corner to the witness. Indicate whether corner was found, set, or replaced and show north arrow.

REFERENCE MEASUREMENTS ( at least three vicinity references must be given below even if they appear on the above sketch ):

Description	Bearing	Distance
PK NAIL IN POWER POLE	N 80°05'24" E	165.71'
PK NAIL IN POWER POLE	S 06°56'25" E	223.48'
PK NAIL IN POWER POLE	N 79°44'09" W	167.23'
PK NAIL @ PI SEATON AVE.	N 00°23'17" E	2412.74'

SURVEYORS CERTIFICATE: I certify the monument and accessories indicated above were field located on SEPTEMBER 1, 19 93.

[Signature] PLS 4260  
 SIGNATURE  
9-27-93  
 DATE  
 CHARLOTTE COUNTY SURVEY DEPT.  
 FIRM OR AGENCY  
 7000 FLORIDA STREET  
 ADDRESS  
 PUNTA GORDA, FLA. 33950  
 CITY STATE

547



SEND TO:  
 Department of Natural Resources  
 Bureau of Survey and Mapping  
 3900 Commonwealth Boulevard  
 Mail Station 105  
 Tallahassee, Florida 32399

DNR 53-001(16)  
 REV. 7/16/92  
 PAGE 2 OF 2

Completeness checked by: [Signature]  
 Accepted and filed: 11-9-93 Date  
 B.I.M. - I.D. 18030211 D.N.R. USE ONLY