

4023J05


DOC. # **0045951**

FLORIDA DEPARTMENT OF NATURAL RESOURCES  
CERTIFIED CORNER RECORD

J-05

CORNER DESCRIPTION:

N.E. corner of Section 18 ,  
Twp 40 S. , Rge 23 E. ,  
Tallahassee Base Meridian,  
CHARLOTTE County(s), Florida.

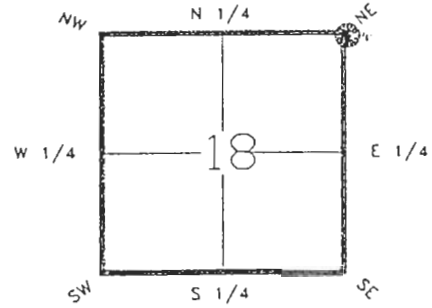

Depict corner with ⊙

MONUMENTATION DESCRIPTION:

Describe original monument and accessories, or subsequent restoration. Give sources of information. (If no attempt was made to search for the original monument and accessories, this information is not necessary.)

NONE FOUND

Description of corner evidence found:

RAILROAD SPIKE

State method(s) to determine corner location (lost corners only):

HORIZONTAL POSITION INFORMATION ( if determined ):

Latitude 27°00'09.46698"N Longitude 82°02'28.58538"W  
Y(Northing) 295696.086(M) X(Easting) 195903.718(M) Zone FL W  
Convergence -0°01'07.462' Scale factor 0.99994138

Coordinate determination (circle one): Field traverse GPS

Horizontal datum (circle one): NAD27 NAD83(1986) NAD83(1990) other (explain)

Order of accuracy as defined in "Standards and Specifications for Geodetic Control Networks" published by the Federal Geodetic Control Committee (circle one):

1st, 2nd, 3rd, class 1 ,

or, Minimum Technical Standards (Chapter 21HH-6, F.A.C.) ratio of closure for field data (example 1:10,000), \_\_\_\_\_ . This does not specify an order of accuracy.

Control point(s) used for survey:

Comments:


**RECEIVED**  
JUL 26 1993

**\*\*PLEASE SEND ORIGINAL ONLY\*\***  
**\*\*PLEASE COMPLETE IN BLACK INK OR TYPE\*\***

DNR 53-90104  
REV. 1/6/92  
SURVEY & MAPPING  
PAGE 1 OF 2

0045951

DOC. #

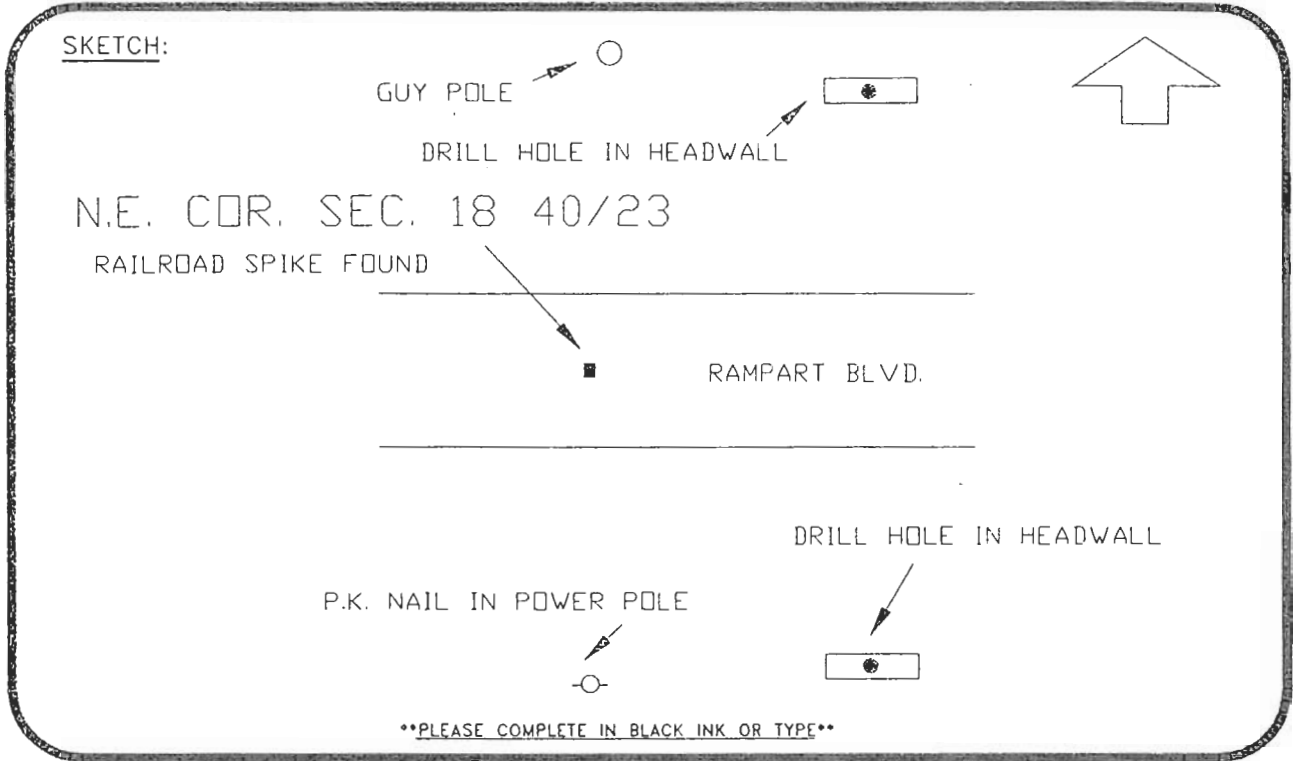

BASIS OF BEARING: SOLAR OBSERVATION REFER: F.B. 276-26  
 All bearings and distances must be from the corner to the witness. Indicate whether corner was found, set, or replaced and show north arrow.

REFERENCE MEASUREMENTS ( at least three vicinity references must be given below even if they appear on the above sketch ):

Description	Bearing	Distance
DRILL HOLE IN NORTH HEADWALL	N.44°54'34"E.	62.71'
DRILL HOLE IN SOUTH HEADWALL	S.44°05'49"E.	63.11'
P.K. NAIL IN POWER POLE	S.00°13'34"W.	48.39'
GUY POLE	N.'LY	76.80'

SURVEYORS CERTIFICATE: I certify the monument and accessories indicated above were field located on DECEMBER 12, 1991.

[Signature] PLS 4260  
 SIGNATURE  
July 12, 1993  
 DATE  
 CHARLOTTE COUNTY SURVEY DEPT.  
 FIRM OR AGENCY  
 7000 FLORIDA STREET  
 ADDRESS  
 PUNTA GORDA, FLA. 33950  
 CITY STATE



SEND TO:  
 Department of Natural Resources  
 Bureau of Survey and Mapping  
 3900 Commonwealth Boulevard  
 Mail Station 105  
 Tallahassee, Florida 32399

DNR 53-001(16)  
 REV. 7/16/92  
 PAGE 2 OF 2

Completeness checked by: GREEN  
 Accepted and filed: 8-93  
 B.L.M. - I.D. 18070817 Date  
 D.N.R. USE ONLY